


**Liquid Tight Conduit Connector With Internal Threads,
 Female Liquid Tight Fittings (YCM)**

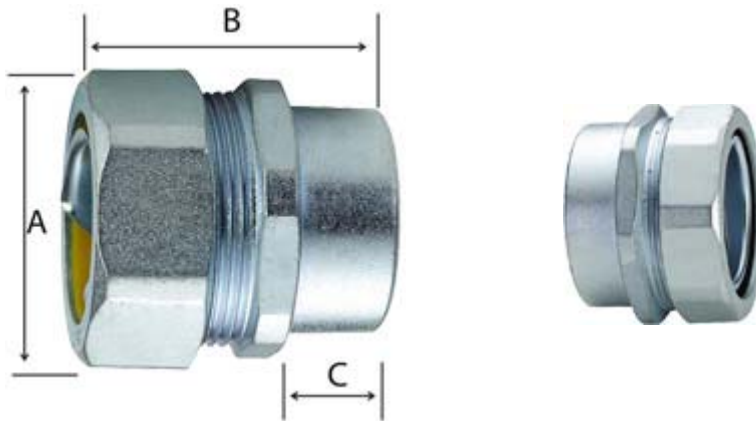

No.	Trade Size	Dimensions (mm)				Threads
		I.D.	A	B	C	
YCM-03	3/8"	11.2	28.3	44.6	13.2	PT 1/2"
YCM-04	1/2"	14.8	34.2	44.6	13.2	PT 1/2"
YCM-06	3/4"	18.7	41.1	51.0	14.3	PT 3/4"
YCM-10	1"	24.8	48.6	58.1	19.2	PT 1"
YCM-12	1-1/4"	33.1	56.6	70.2	20.8	PT 1-1/4"
YCM-14	1-1/2"	38.0	71.3	75.7	21.7	PT 1-1/2"
YCM-20	2"	48.8	86.6	84.4	21.7	PT 2"
YCM-24	2-1/2"	59.4	103.1	101.8	25.9	PT 2-1/2"
YCM-30	3"	75.8	120.0	110.0	26.4	PT 3"
YCM-40	4"	97.6	157.0	118.6	29.0	PT 4"
YCM-50	5"	139.0	168.0	96.0	29.0	PT 5"
YCM-60	6"	143.0	194.9	109.9	31.3	PT 6"

Female liquid tight connector connects the flexible conduit to male threads.

Available with Internal Threads : PT, G, PF, PG, METRIC, NPT



Typical applications for liquid tight connector with internal threads: Coupling a flexible conduit to IMC or RSC conduit