



Water-tight PVC Coated Flexible Stainless Steel Conduit (YF-707-SS)

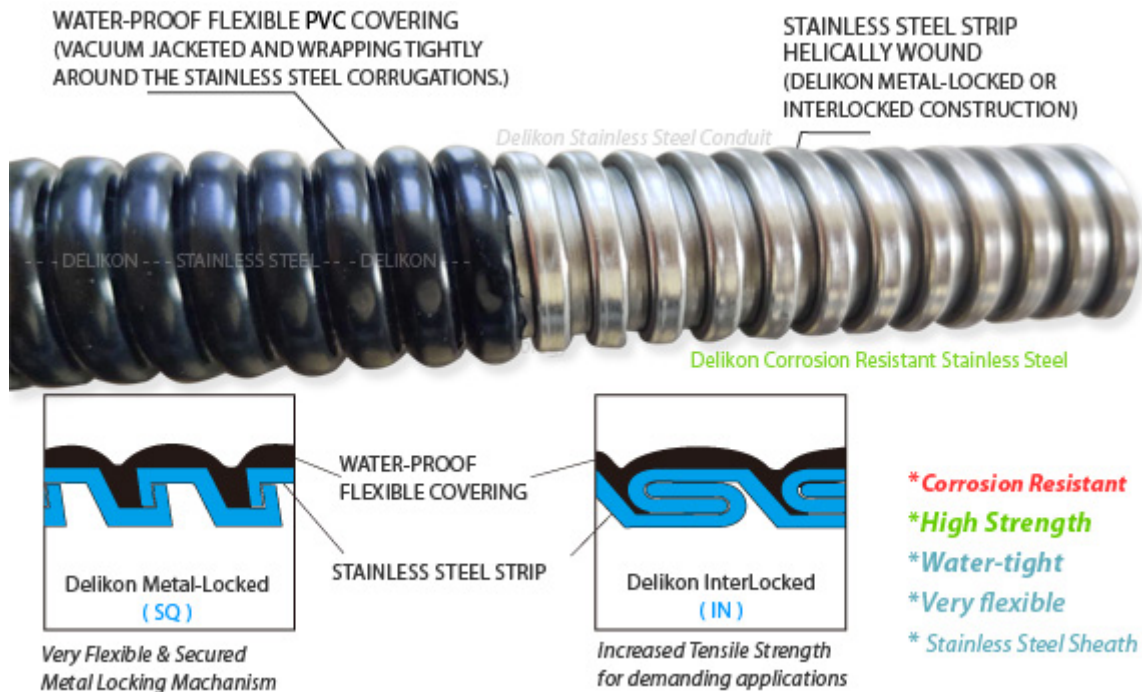

Type	Trade Size	I.D. (mm)		O.D. (mm)		Min. Bending Radius (mm)	Meter/Coil
		Min.	Max.	Min.	Max.		
YF-70701-SQ-SS	-	7.8	8.2	11.2	11.6	50	100
YF-70702-SQ-SS	1/4"	9.7	10.2	14.0	14.5	50	100
YF-70703-SQ-SS	3/8"	12.3	12.8	16.7	17.2	50	50
YF-70704-SQ-SS	1/2"	15.7	16.3	20.2	20.7	65	50
YF-70706-SQ-SS	3/4"	20.7	21.2	25.5	26.1	75	50
YF-70710-SQ-SS	1"	26.0	26.6	31.6	32.2	100	50
YF-70712-SQ-SS	1-1/4"	34.7	35.4	40.8	41.5	125	30
YF-70714-SQ-SS	1-1/2"	40.0	40.6	46.6	47.2	150	25
YF-70720-SQ-SS	2"	51.3	51.9	58.1	58.7	175	20
YF-70724-SQ-SS	2-1/2"	62.9	63.6	72.1	73.0	200	10
YF-70730-SQ-SS	3"	77.9	78.7	87.9	88.9	225	10
YF-70740-SQ-SS	4"	101.6	102.6	113.2	114.3	275	10
YF-70750-SQ-SS	5"	125.0	127.0	137.0	139.5	300	5
YF-70760-SQ-SS	6"	150.0	153.0	162.0	165.0	400	5

		INTERLOCKED (IN) (HIGHER TENSILE STRENGTH)					
Type	Trade Size	I.D. (mm)		O.D. (mm)		Min. Bending Radius (mm)	Meter/Coil
		Min.	Max.	Min.	Max.		
YF-70701-IN-SS	-	7.8	8.2	11.2	11.6	50	100
YF-70702-IN-SS	1/4"	9.7	10.2	14.0	14.5	50	100
YF-70703-IN-SS	3/8"	12.3	12.8	16.7	17.2	50	50
YF-70704-IN-SS	1/2"	15.7	16.3	20.2	20.7	65	50
YF-70706-IN-SS	3/4"	20.7	21.2	25.5	26.1	75	50
YF-70710-IN-SS	1"	26.0	26.6	31.6	32.2	100	50
YF-70712-IN-SS	1-1/4"	34.7	35.4	40.8	41.5	125	30
YF-70714-IN-SS	1-1/2"	40.0	40.6	46.6	47.2	150	25
YF-70720-IN-SS	2"	51.3	51.9	58.1	58.7	175	20
YF-70724-IN-SS	2-1/2"	62.9	63.6	72.1	73.0	200	10
YF-70730-IN-SS	3"	77.9	78.7	87.9	88.9	225	10
YF-70740-IN-SS	4"	101.6	102.6	113.2	114.3	275	10
YF-70750-IN-SS	5"	125.0	127.0	137.0	139.5	300	5
YF-70760-IN-SS	6"	150.0	153.0	162.0	165.0	400	5

Most suitable for use with Delikon stainless steel conduit fittings covering a broad range of electrical wiring applications. Delikon Jacketed Flexible Stainless Steel Conduit and Stainless Steel Connector are used for Wiring Harness of Electric and Hybrid Electric Vehicles, agriculture equipment, automation and autonomy wiring harness for agriculture.